



The Timbre control must be connected to either J1 or J2. This gives you the possibility to react to the combined tolerances of the dual gang potentiometer and the capacitors.

The other Jumper must be bridged, so it's Pin 1 and Pin 2 are connected!



*decide with your ears and fingers

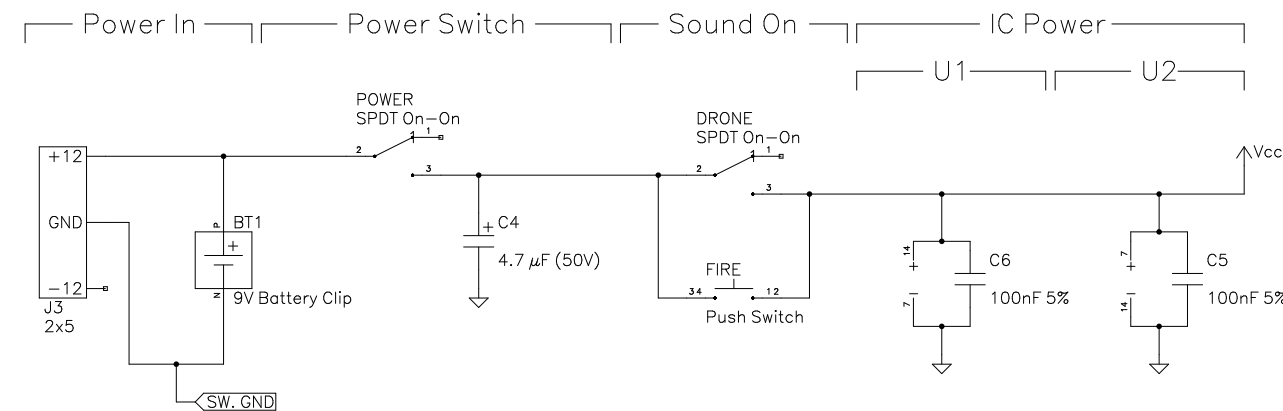

GND will be connected here if output cable is plugged in

Sheet Main	Number 1/1
Project Le Truc	Revision 0.9
Drawn by wotwot & atoav	
License CC-BY-NC-SA	
Date 2019-10-19	

